

Document filename: ITK2.2	Client Host and Middlewa	e Requirements	
Directorate / Programme :	NHSD - Architecture	Project	Interoperability
Document Reference :		HSCIC-ITK-ARCH-102-	1
Project Manager :	Keith Naylor	Status :	Final
Owner:	George Hope	Document Version :	1.0
Author:	George Hope	Version issue date :	01/05/2016

ITK2.2 Client, Host and ITK Middleware Requirements

Document Management Revision History

Version	Date	Summary of Changes
1.0	May 2016	First version of ITK 2.2 issued by NHSD

Reviewers

This document was reviewed by the following people:

Reviewer name	Title / Responsibility	Date	Version
George Hope	ITK Architecture Lead	May 2016	1.0
Richard Kavanagh	ITK Messaging Lead	May 2016	1.0
Richard Dobson	ITK Accreditation Manager	May 2016	1.0
Nigel Saville	ITK Accreditation	May 2016	1.0

Approved by

This document was approved by the following people:

Name	Signature	Title	Date	Version
Shaun Fletcher		Head of Architecture	May 2016	1.0

Reference Documents

Ref no	Doc Reference Number	Title	Version
1.			
2.			
3.			
4.			

Document Control:

The controlled copy of this document is maintained in the NHSD corporate network. Any copies of this document held outside of that area, in whatever format (e.g. paper, email attachment), are considered to have passed out of control and should be checked for currency and validity.

Contents

1	Introduction	5
1.	1 Purpose of Document	5
1.	2 ITK Architecture Documentation Set	5
1.	3 Audience	5
1.	4 Document Scope	6
1.	5 Document Overview	6
1.	6 Requirements Presentation	6
1.	7 Reference Implementation	6
2	Messaging Architecture	7
2.	1 Documentation	8
2.	2 Error Handling	9
2.	3 Message Configurations	9
2.	4 Reliability	10
2.	5 Security	11
2.	6 Validation	12
3	Supporting Infrastructure	13
3.	1 Alerting	13
3.	2 Application Specific	14
3.	3 Infrastructure Security	15
3.	4 Logging	16
3.	5 Middleware Specific	16
3.	6 Non Functional	17
3.	7 Time	18
4	Additional Modules	19
4.	1 Discovery	19
4.	2 Information Governance – Application Cross Organisational Data Sharing	19
4.	3 Information Governance – Application Location Shielding	20
4.	4 Information Governance – NHS Number	21
4.	5 Information Governance – Legitimate Relationships	22
4.	6 Information Governance – Middleware Cross Organisational Data Sharing	22
4.	7 Information Governance – Sealing	23
4.	8 Monitoring and Management	24
4.	9 Orchestration	25

4.10	Sequencing	25
4.11	Spine Mini Services	28
4.12	Translation and Mediation	29
4.13	Throttling	30
4.14	Validation	31
4.15	XML Encryption	31

1 Introduction

This document forms part of the overall document set for ITK Architecture.

1.1 Purpose of Document

This document defines the specific requirements for ITK Client, ITK Host, ITK Middleware, ITK Spine Mini Service Provider (SMSP) accreditation.

1.2 ITK Architecture Documentation Set

The position of this document in relation to the document set is shown below.

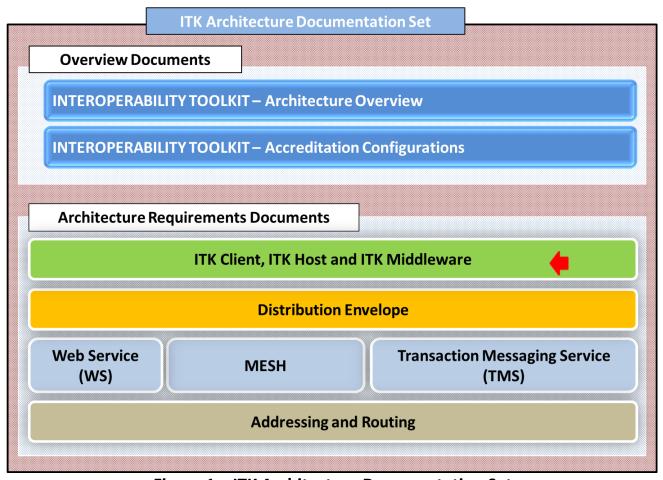


Figure 1 – ITK Architecture Documentation Set

1.3 Audience

The primary audience are supplier technical and product development staff who are interested in developing a Toolkit Implementation.

1.4 Document Scope

The document covers the messaging architecture and supporting infrastructure requirements in relation to the roles of ITK Clients, Hosts and Middleware. It also describes additional modules such as Information Governance and XML Encryption which may be optional or mandatory depending on the selected role of the ITK Client, ITK Host and ITK Middleware.

1.5 Document Overview

The rest of this document covers a number of areas of functionality. Within each area the functionality is described, and a number of formal requirements are listed in bold type, with additional detail provided in smaller type below this.

1.6 Requirements Presentation

The requirements are presented in the format given below:

Ref (1)	Description (2)	Client	Host	MW	SMSP
		(3)	(4)	(5)	(6)
COR-REL-03	Toolkit Implementations MUST retain responsibility for processing until a request completes	Υ	N	Y	N
NB (7)	Specifically, any response returned from the initial part of the NOT indicate a transfer of responsibility. It is only a transport NOT imply that the message has necessarily been persisted of responsibility, nor promise that subsequent application pro-	t acknowl , nor doe	edgeme s it indic	ent, and ate a tra	it does ansfer

Clarification Notes

- (1) The requirement reference
- (2) The Description of the requirement
- (3), (4), (5) and (6) Shows the requirements applicability for accreditation
- (7) Provides further details relating to the requirement and supplementary notes

Colour Coding Notes

- The fill colour of the Reference relates to a particular document from the document map.
- Where requirements are universally applied the fill colour will always be blue. Where
 requirements are conditional and may impact accreditation the fill colour will be Orange.
- See the Accreditation Configuration spread sheet for related details.

1.7 Reference Implementation

An ITK reference implementation pack is available as a training and development aid and it contains example code snippets for typical Healthcare Interoperability scenarios.

http://developer.nhs.uk/library/interoperability/nhs-interoperability-framework/

2 Messaging Architecture

The diagram below overviews ITK messaging components, which consists of the following:

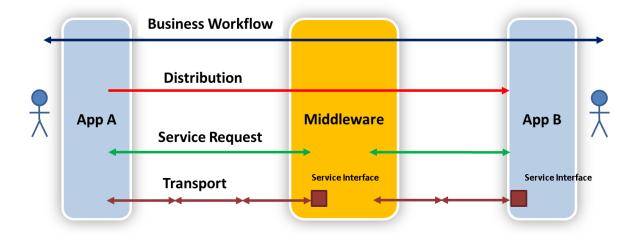


Figure 2 – ITK Messaging Architecture

- Payload business level content is the clinical information being shared between ITK compliant systems.
- Service Interface a transport dependent means of sending and receiving messages.
- Distribution Infrastructure a set of wrappers (the "Distribution Envelope") for managing end-to-end distribution of ITK messages. This distribution infrastructure is independent of any lower-level transport protocol. (Subsequent specification documents explain the use of this Distribution Envelope to provide a facility for addressing and routing messages across multiple transport "hops".
- Transport the underlying technology used for transporting messages. The currently
 defined ITK transports are Data Transfer Service (DTS), Transaction Messaging Service
 (TMS) and Web Service (WS).

Not that overarching these technical elements implied a layer of business workflow. For example, there may be a long-running orchestration whereby an initial message triggers a dialogue of further related messages (in both directions). This is supported by the business information and identifiers within the payload (e.g. HL7v3 CDA document refer handling specifications and interactions).

The rest of this section defines the requirements of the ITK messaging architecture.

2.1 Documentation

Ref	Description	Client	Host	MW	SMSP
COR-SUP-01	Toolkit Implementations MUST provide message payload content in the Distribution Envelope	Υ	Υ	Υ	Y
NB	For HL7v2 content then the Service Definition artefacts defin and a pipe-and-hat representation of this same content. Whi preferred strategic direction, the pipe-and-hat representation	le the XIV	IL repres	sentatio	

WS-STD-02	HL7v2 Pipe-and-Hat content MUST be Base64 encoded	Υ	Υ	Y	Υ	
1.	Schemas which allow HL7v2 pipe-and-hat content to be carried in a string element -this string MUST be Base64 encoded.					
NB	This requirement is only applicable to Admission Discharge a Domain Message Specifications.	and Trar	nsfer (A	DT), HL	7 v2	

COR-SUP-02	Toolkit Implementations MUST provide a published list of supported interfaces, based on complete "Service Bundles" as specified in the Toolkit Service Listing	Y	Y	Y	Y
1	Supported services MUST be documented, and it MUST be m implementation acts as a Host and/or Client of each service.	ade clea	ar wheth	er the	
2	Supported services SHOULD also all be connected and configured a Toolkit implementation.	gured as	part of t	he initia	l setup
NB	Service interfaces are organised into "bundles" of related mes these bundles are based on IHE Profiles, while for HL7v3 the as Domains. When implementing a bundle then the Toolkit Service Listing a "mandatory" for a given implementation role (Host, Client, Mid bundle then those messages marked as "mandatory" for the ir supported. Those messages not marked as "mandatory" for a only if they are not relevant to a particular implementation, and documented and justified.	message denotes dleware nplemer bundle i	e bundle certain r). If implatation's may be o	es are de message ementin role mu omitted	efined es as g a st be

COR-SUP-03	Toolkit Implementations MUST provide design-time documentation describing the services available	Y	Y	Y	Y
NB	Design time documentation may include solution overviews, so etc.	olution a	rchitectu	ıre diagı	rams

2.2 Error Handling

Ref	Description	Client	Host	MW	SMSP
COR-ERR-01	Toolkit Implementations MUST provide Error Handling	Υ	Y	Υ	Y
NB	Error handling is implemented at each layer of the ITK Imp SOAP, Distribution Envelope, Business Application. If an Infrastructure Acknowledge is not requested by the se Envelope and Business layers will not be conveyed back to	ender, erro	ors at the	•	•

2.3 Message Configurations

Ref	Description	Client	Host	MW	SMSP		
COR-PAT-01	Toolkit Implementations MUST support the Toolkit Message Configurations	Y	Υ	Y	Υ		
NB	The configurations defined in the Domain Message Specification and configured in the Handling Spec section of the Distribution Envelope must be implemented.						

COR-PAT-02	Toolkit Implementations MUST support the Toolkit Service Invocation styles	Y	Υ	Υ	Y
NB	The invocation styles (Asynchronous, Synchronous) are define	ed within	each D	MS.	

COR-PAT-03	Toolkit Implementations SHOULD support	N	N	N	N
	configuration of either or both synchronous and				
	asynchronous invocation styles.				
1	The synchronous and/or the asynchronous invocation style muservice is called asynchronously, the sender must provide a re			. When	a

COR-PAT-04	Toolkit Implementations MUST specify which of the Toolkit Service Invocation styles each service endpoint supports	N	N	N	N
NB	Invocation Style to be defined at deployment.				

2.4 Reliability

When a requestor makes a call to a provider, the provider assumes control of the request and MUST ensure that all relevant processing is completed before returning a response, or throws an exception. This ensures that the requestor is always able to act based on complete and reliable information in relation to the state of its request.

A request is in one of the following states:

- "In progress", in which case the requestor is waiting on request completion
- "Completed successfully"
- "Completed but known to have failed"

In the last two cases, the requestor can continue with reliable information on the state of the process. In the first, the requestor MUST NOT until the outcome of the request is known.

Ref	Description	Client	Host	MW	SMSP	
COR-REL-01	Toolkit Implementations MUST ensure all relevant processing is finished before becoming quiescent.	N	Υ	Υ	Υ	
NB	Request Response - the request must be fully actioned. For the request must have been forwarded and all processing correcipient application. For a recipient application this means the committed to persistent storage. The response indicates that request is complete, and contains any necessary information	ng completed by the ultimate ans that any update must have been s that all processing of the service				
NB	Request – the request must be accepted and persisted: the been accepted and the provider is now responsible for attem course,					

COR-REL-02	Toolkit Implementations MAY retry if a transport response is not received	Y	N	Υ	N
NB	The lack of a transport-level response within any expected till that the transport-level transmission may have failed. In thes Toolkit Implementation may retry if the underlying transport response.	e circums	stances	the send	

COR-REL-03	Toolkit Implementations MUST retain responsibility for processing until a request completes	Y	N	Υ	N
NB	Specifically, any response returned from the initial part of the NOT indicate a transfer of responsibility. It is only a transport NOT imply that the message has necessarily been persisted of responsibility, nor promise that subsequent application pro-	t acknowl , nor doe	edgeme s it indic	nt, and ate a tra	it does ansfer

COR-REL-04	Toolkit Applications MUST provide business de- duplication where this is needed	N	Y	N	N
NB	It is always possible for a service to be invoked more than or invocation may appear to fail and be retried – either by an authorefore if this is an issue then the Toolkit Application must recognising this (i.e. by comparison of business attribute(s) of invocations received). The application must then take appropriately asking for confirmation, overwriting the previous received.	utomated take resoft the mean toriate action	process ponsibili ssage w	or a us ty for ith previ	er. ous

COR-REL-05	Toolkit Implementations MUST provide details of how services handle, and recover from, transport failures during execution	Y	N	Υ	N
NB	A service which does not complete before the invocation time uncertain of the state of the request and its business data. To provide information as to how such cases are safely handled	oolkit imp			

2.5 Security

Ref	Description	Client	Host	MW	SMSP
COR-SEC-01	Toolkit Implementations MUST use a transport which protects the confidentiality and integrity of the message in transit	Y	Υ	Y	Υ
NB	This provides fundamental protection against a malicious par with the message content. For example, this might be implen transport by using TLS.				

COR-SEC-02	Toolkit Implementations MUST use a transport which identifies the requesting system	Υ	N	Υ	Υ
NB	This provides the basis for application-based security. Systems that send requests (that is, both originators and relay transport, the identity of the sending system. Details of sender included in the specifications for the individual transports. Note transport-level features, this system identification applies peris sent from App A, via Middleware M to App B, then the syste for the link from A-Middleware, and then change to "Middleware Middleware-B.	identity that, as nop. For m identit	requirer s with all example ty would	nents ar other e if a rec be "App	quest

COR-SEC-03	Toolkit Implementations MUST use a transport which can authenticate the requesting system's identity	N	Υ	Υ	Υ	
1	Inbound messages MUST be able to be checked to ensure that they are indeed from the sending system that they claim to be from.					

2	The Toolkit Implementation MUST reject any messages that fail this authentication check.
NB	While this capability must be available, it may be disabled (e.g. for performance reasons) if it can be proven that the entire deployment is within a secure and controlled environment. Thus guaranteeing via infrastructure-level security and tightly controlled procedures that no spoofing of an application within the secure environment is possible.

COR-SEC-04	Toolkit Implementations MUST use a transport which is able to authorise a service request, based on the the requesting system's identity.	N	Υ	Y	Υ			
1	Inbound messages must be able to be checked to ensure that the requesting system is indeed allowed to invoke this service. Due to the application-based security approach, the requestor's identity will be either that of the calling application or of an intermediary (e.g. Toolkit Middleware - see COR-SEC-02).							
2	Toolkit Implementation MUST reject any messages that fail thi	Toolkit Implementation MUST reject any messages that fail this authorisation check.						
NB	Where Toolkit Middleware is in use then it acts as a mediator of Toolkit Middleware is therefore responsible for managing access calling application's identity, and acts as a trusted source of all application. In this case, the task of the host application is greatly simplified authorisation rules are offloaded to the Toolkit Middleware. The needs to authorise only incoming calls from the Toolkit Middleware.	ss to se I reques d - as th e host a	rvices b ts to a h e details	ased on ost s of	the			

COR-SEC-05	Toolkit Implementations SHOULD be able to authorise a service request, based on the Service and the Audit	N	Υ	Y	Y	
NB	Identity within the message The audit identity is contained within the message as part of the state of the s					
	(Strictly speaking therefore it is not part of the Transport layer in terms of security and therefore covered here for completene allows for authorising a request based on the sending system, more granular authorisation based on the individual user's idea Audit Identity of the Distribution Envelope. Note that (in the absence of a single accepted identity scheme contexts in which ITK may be used) the Audit Identity itself car authenticated. It can however be relied upon based on a chair previous requirements in this section: COR-SEC-01 ensures that the originated from a known and approved application, that can be users and to provide an accurate value for the Audit Identity.	art of the Transport layer - however it is closely related vered here for completeness) While COR-SEC-04 d on the sending system, this requirement allows for a nother individual user's identity - as contained within the slope. accepted identity scheme across all organisational he Audit Identity itself cannot currently be strongly and upon based on a chain of trust which builds on all as COR-SEC-01 ensures that the message has not been 12, 03, 04 ensure that the message has indeed application, that can be trusted to authenticate its				

2.6 Validation

Requestors are responsible for sending valid messages, but providers SHOULD perform at least basic syntactic validation on a received message before attempting to process it. The specification of detailed business rules and other validations is given in the ITK service definitions

Ref	Description	Client	Host	MW	SMSP	
COR-VAL-01	Toolkit Implementations SHOULD perform at least syntactical validation before attempting to process a request	N	Υ	Υ	Υ	
NB	·					

COR-VAL-02	Toolkit Applications MUST perform any necessary business validation of their inputs	N	Υ	N	Υ
NB	Business "Validation" means validation over and above syntactical validation of the message structure. For example, checking that a patient actually exists, that it is valid to book a procedure for that time and location, and so on. These validations involve knowledge of state and / or business rules that only the application itself can be expected to have.				

COR-VAL-03	Toolkit Applications SHOULD perform defensive syntactical validation of their inputs	N	Y	Y	Y			
1	There are various options for configuring validation in a chain of systems; and to provide the widest range of options Toolkit Applications SHOULD be coded defensively - with the ability to ensure that their inputs are syntactically valid.							
2	Syntactical validation SHOULD be configurable on / off, so that it can be switched off in performance-critical situations if the deploying organisation is satisfied that sufficient alternative safeguards are in place.							

Requirement is deprecated from July 2015.

3 Supporting Infrastructure

In order to ensure continuity of service there are a number of requirements associated with the infrastructure. These requirements relate to the operational environment within which an ITK deployment is running.

3.1 Alerting

Ref	Description	Client	Host	MW	SMSP
IFC-ALT-01	Toolkit Implementations SHOULD allow technical alerts to be configured	Υ	Υ	Y	Υ

1	Toolkit implementations SHOULD allow alerts to be generated based on but not limited to sizes, message throughput, Error Store and throttling backlog.

IFC-ALT-02	Toolkit Implementations SHOULD support SNMP alerting	Y	Y	Υ	Y	
1	Toolkit implementations SHOULD provide a SNMP alerting mechanism to Service Monitoring systems.					
2	Toolkit implementations SHOULD provide a SNMP interface for interrogation of counters and manipulation of configuration.					

3.2 Application Specific

Ref	Description	Client	Host	MW	SMSP	
IFA-REL-01	Toolkit Applications MUST provide error notifications that support End-User, Automated, and Administrative processing	N	Υ	N	Υ	
1	Toolkit implementations MUST provide an Error Store where failed calls / messages can be routed for administrator attention.					

IFA-REL-02	Toolkit Applications receiving error notifications	Υ	N	N	Υ
	MUST provide layered error handling to cover End-				
	User, Automated, and Administrative error processing				

IFA-DIS-01	Toolkit Applications SHOULD be able to look up the location of Toolkit endpoints dynamically using a Registry	Y	N	N	N

Requirement is deprecated from July 2015

IFA-SEC-01	Client Applications MUST take responsibility for enduser authentication, authorisation and audit	Y	N	N	N
1	The ITK Trust Operating Model document set provides more in for determining what controls are required in a given situation. In relation to Auditing, Toolkit Implementations - MUST maintaincluding connections and requests for information both when Such audit logs SHOULD record origin and other requestor ideasuch as patient identifier where available.	in a log success	of audita	able eve	ents se.
NB	Note: The Trust Operating Model documentation set provides process for determining what controls are required in a given s			n about	this

IFA-SEC-02	For messages where a Distribution Envelope Audit Identity is provided then Toolkit Applications MUST record this in their audit logs	Y	Υ	N	Υ

3.3 Infrastructure Security

Ref	Description	Client	Host	MW	SMSP				
IFC-SEC-01	Toolkit Implementations MUST comply with standard NHSD guidance for audit	Υ	Y	Y	Υ				
NB		Toolkit implementations MUST provide audit and alert in compliance with the CFH IG document "IG Audit & Alerts Gold Standard" document ref: NPFIT-FNT-TO-IG-PRJMGT-0093.05							

IFC-SEC-02	Toolkit Implementations MUST comply with standard NHSD guidance for infrastructure and data security	Υ	Υ	Y	Υ
1	Based on the findings of a risk assessment the Toolkit Implemdisk encryption unless the risk assessment finds otherwise e.g not going to hold PID or is located in a secure data centre envi	. the To	olkit Im		
2	Encryption, if required SHOULD meet with the Information Sec Cryptographic Algorithms	curity Te	eams Ap	oproved	d
3	Other data security standards that MUST be adhered to are Di Sensitive Data	sposal	and De	structio	n of
4	Other data security standards that MUST be adhered to are Se	ecure U	se of th	e N3 N	etwork

NB	Information Governance standards for systems for NHS and partner organisations are made
	available at http://systems.hscic.gov.uk/infogov

3.4 Logging

Ref	Description	Client	Host	MW	SMSP
IFC-LOG-01	Toolkit Implementations MUST support configurable diagnostic logging	Υ	Υ	Y	Y
1	Toolkit implementations MUST provide diagnostic logging of	message	s and e	vents.	
2	Toolkit implementations MUST provide a real time configural the logging to be switch on during testing or troubleshooting.	ole contro	l of logg	jing, to a	allow
3	Toolkit implementations SHOULD provide the equivalent of cincluding but not limited to: Errors only – logs only errors - recording at least the messa timestamp in each case. This might typically be used in a maproduction environment. Informational – logs message id, message type, timestamp, information about each message. This might typically be use production environment Full diagnostic – logs message id, message type, timestam message. This might typically be used in test environment, o circumstances for troubleshooting in a production environment	ge ids, m ture and and limit d for trou p, plus fu r in carefi nt.	essage high vol ed addii bleshoo Il details ully cont	type, a ume tional ting in a s of each rolled	nd
4	Toolkit implementations MUST record the Tracking ID appear Envelope, within the logs.		e Distrib	ution	

IFC-LOG-02	Toolkit Implementations MUST ensure Patient Identifiable data is adequately protected in log files and administrative tools	Υ	Y	Υ	Υ

3.5 Middleware Specific

Ref	Description	Client	Host	MW	SMSP
IFM-REL-01	The Toolkit Middleware MUST provide an Error Store	N	N	Υ	N
NB	Toolkit implementations must provide an Error Store where for administrator attention.	ailed calls	s / mess	ages ca	n be

IFM-VSN-01	The Toolkit Middleware MUST support configurable addition / removal of service definitions	N	N	Y	N
NB	In order to support future evolution of the Toolkit, it must be particular to add new service definitions (and configuration change only.				

IFM-NFR-01	The Toolkit Middleware SHOULD be capable of scaling to support a broad range of deployments	N	N	Υ	N

	The Toolkit Middleware SHOULD be capable of providing high-availability	N	N	Υ	N

IFM-SEC-01	The Toolkit MUST implement stringent security controls for device administration	N	N	Υ	N			
1	Toolkit implementations MUST provide remote administrative secure channel i.e. HTTPS or SSH.	e console	s delive	red ove	r a			
2	Toolkit implementations MUST provide a limited number of a by a process policy to manage the user access requests.	Toolkit implementations MUST provide a limited number of administrative users supported by a process policy to manage the user access requests.						
3	Toolkit implementations MUST use password management in compliance with the password policy as defined in the NHS GPG for non-spine connected systems. Ref: http://systems.hscic.gov.uk/infogov/security/infrasec/gpg/ppfnsca.pdf							
4	Toolkit implementations MUST use 2 factor authentication if visible.	PID data	can be	accesse	ed or			

3.6 Non Functional

Ref	Description	Client	Host	MW	SMSP
IFC-NFR-01	Toolkit Implementations MUST support a configurable maximum message size	Υ	Υ	Υ	Υ
1	Toolkit implementations MUST, in order to support interope support and honour the required maximum message size the message type				

2	Toolkit implementations MUST honour a configurable maximum message size. This size applies to the entirety of the message – i.e. including and distribution envelope and other transport wrappers, and after any compression and base64 encoding is applied.
3	Toolkit implementations MUST accept incoming messages that are smaller than or equal to the configurable maximum message size.
4	Toolkit implementations MAY reject incoming messages if they are larger than this required maximum size.
5	Toolkit implementations SHOULD NOT generate messages that are larger than this required maximum size.
6	Toolkit implementations MUST take responsibility for ensuring that any endpoint sent a larger message than the required maximum is able to handle it (e.g. by local agreement).

3.7 Time

Ref	Description	Client	Host	MW	SMSP
IFC-TIM-01	The Toolkit Implementation system clock MUST be synchronised with a consistent time source to within 250 milliseconds	Υ	Y	Υ	Υ
1	Toolkit implementations MUST use a NTP service that is conmilliseconds across the estate.	sistent to	within 2	250	
2	Toolkit implementations SHOULD use a NTP service that is	at least a	Stratum	3 time	source.
3	Toolkit implementations SHOULD use a NTP service that ret (GMT), an equivalent of Coordinated Universal Time (UTC).	urns Gre	enwich I	Mean Ti	me

IFC-TIM-02	All timestamps generated by Toolkit Implementations MUST comply with issued guidance on time zones	Y	N	Υ	Y
1	Toolkit implementations and their messages MUST comply wit 0005.14 – Clarification on Time Zone"	h "NPFI	T-FNT-1	ro-scg	i-

IFC-TIM-03	All timestamps displayed by Toolkit Implementations MUST comply with issued guidance on time zones	Y	Y	Y	Y

4 Additional Modules

4.1 Discovery

Ref	Description	Client	Host	MW	SMSP
MOD-DIS-01	Toolkit Implementations SHOULD expose run-time endpoint information to clients via a UDDI v3 Registry Interface	N	0	Υ	0
1	The Toolkit implementation SHOULD support a UDDI v3 reservices.	gistry for	exposu	re of en	dpoint

4.2 Information Governance – Application Cross Organisational Data Sharing

Ref	Description	Client	Host	MW	SMSP
MOD-AIG-08	Toolkit Applications MUST ensure that the patient's consent preferences are honoured when sharing Detailed Care Record information across organisational boundaries	Υ	N	N	N
NB	There are several means by which Toolkit Applications ma Care Record (DCR) information across organisational bour • An application belonging to one organisation may receive an application belonging to a different organisation • An application may present a user interface (e.g. web por from other organisations • An application may have other (non-Toolkit) integrations applications belonging to other organisations In all cases a Toolkit application must ensure that, prior to Care Record information across organisational boundaries preferences are checked and the results of this check are responses Dissent then the DCR information sharing must. The preferred approach to performing this check is that an the patient's DCR Consent preferences as recorded by the intended to be a National setting that is honoured by all application decorations. For example this might involve as recording their response. Note: Options for accessing the PDS Consent Flag include 1. Direct access to PDS by a PDS Compliant application 2. Using a DCR consent flag contained in an incoming Tooleing freshly populated, as described below) In all cases k Number will be needed to achieve this consent preferences.	allowing state and the patient of th	For exama Toolk a Toolk s access ange da sharing of the particular should need. The application of the particular should not should need to attent decreased and the particular should not	nple: it interfa sible to u ta with of Detail nsent atient d make ag. This ion mus irectly, a	ce from users led use of is st offer
	Note: It is essential that a Toolkit Application works from ar patient's consent preferences – to ensure that the patient's				d there

are no loopholes due to time delays. Specifically, if the PDS Consent flag is used then its value must be freshly retrieved from PDS when needed and must not be locally cached beyond the current "session". ("Session" would typically be defined as the logged on user's session, however in non-interactive scenarios it might also be interpreted as a batch job, end-to-end message flow, or workflow instance). In addition, an application must ensure that any consent values populated into Toolkit messages are up-to-date, and not based on stale or cached data.

Note: By default the responsibility is on the initiating application (ITK Client Application) which must ensure that the patient's consent preferences are honoured. This responsibility may be relaxed only for specific circumstances where it can be clearly demonstrated that either the Toolkit Middleware or ITK Host Application(s) have alternative capabilities to ensure that a consent check is done.

4.3 Information Governance – Application Location Shielding

Ref	Description	Client	Host	MW	SMSP
MOD-AIG-01	Toolkit Applications MUST provide capabilities to shield patient location details	Y	Υ	N	Y
NB	This feature might be used, for example, to protect the local spouse. It is intended to offer a reasonable but limited level essential care processes to continue. For higher risk threat are available and should be used - for example, a complete The exact details of what constitutes "adequate" local shiel prescribed here. Typically a shielding capability will involve blanking / obscufields including: Addresses Telephone numbers Email addresses Next of kin details GP details Note that this is not necessarily an exhaustive list. Typically a shielding capability will involve blanking / obscufields including: Addresses Telephone numbers Email addresses Telephone numbers Email addresses Next of kin details GP details Note that this is not necessarily an exhaustive list. Consideration should also be given protecting / deleting his Exactly what is appropriate in any given scenario is a local the breadth of access to the application vs the benefits of ethe data vs the risks of exposure. Further guidance on make management decisions is provided in the Toolkit Trust Open	of protects then alto change ding functions / protections	cation, wheernative of ident tionality tecting leading	etails. con weiglesses t	allowing nisms be related related

MOD-AIG-02	Toolkit Applications MUST pass on knowledge of any shielding of patient location details	Υ	N	N	Y
1	. Where a "shielding" feature as-per MOD-AIG-01 is offered t pass on the value of this patient location "shielding" status in systems.				

MOD-AIG-03	By including the value of the patient "shielding" status, an application allows downstream processing (by the Toolkit Application) to provide appropriate handling of these "shielded" location details	N	Υ	N	Y
NB	Where a location "shielding" feature as-per MOD-AIG-01 is o must apply these protective features when it receives incomi flag set.				

MOD-AIG-04	Toolkit Applications MAY allow shielded location details to leave the application	Y	N	N	Y				
NB	In general it is not necessary for a sending application to "blank out" location details for shielded patients before sending externally, e.g. to the Toolkit Middleware. This is because MOD-AIG-01 mandates that receiving applications will have the ability to appropriately protect shielded location details. This approach provides maximum flexibility for cases where a receiving application may need to make use of the demographic data for valid local processing.								
	Despite the above, some Toolkit Applications may choose to provide additional "shielding" protection for location details be interface. For example: Blanking fields Writing a placeholder value in fields (e.g. "NOT AVAILABLE") Capturing pseudo values – for example the address of a frighteen measures do provide further "shielding" protection of	efore pa E") end who	assing to	hem via orward p	an				
	should be noted that there is a disadvantage as this location circumstances be needed for valid processing in other local	ition ma							

MOD-AIG-05	Toolkit Applications MAY adjust processing flow on receipt of notification that a patient has a shielding setting	N	Υ	N	Υ		
1		An application MAY wish to adjust its processing in other ways when receiving data for shielded" patients (e.g. omitting screens relating to location which may no longer be selevant / meaningful)					

4.4 Information Governance – NHS Number

Ref	Description	Client	Host	MW	SMSP
MOD-AIG-09	Toolkit Applications sending patient data via the Toolkit interfaces MUST include the patient's traced NHS Number as an identifier, if this is known	Y	N	N	Υ

NB	The NHS Number allows the patient to be identified on a National basis, and is thus important for enabling data sharing across organisational boundaries. Typically the message specifications will allow for multiple patient identifiers (including the NHS Number) to be included. This requirement therefore refines the message specification by stating that the traced NHS Number MUST be included as an identifier, if it is known. A traced NHS Number is the preferred patient identifier for interoperability within the NHS.
1	However, if only an unverified NHS Number is known, then this MAY be used if allowed by the Domain Message Specification being implemented.
2	Some Domain Message Specifications also allow a local identifier as a patient identifier. These SHOULD only be used where a traced NHS Number is not available.
3	Local patient identifiers MUST always carry the assigning authority name (as defined in the Domain Message Specification).

4.5 Information Governance – Legitimate Relationships

Ref	Description	Client	Host	MW	SMSP
MOD-AIG-07	Toolkit Applications MUST ensure that a Legitimate Relationship exists before allowing viewing of patient clinical data	N	Υ	N	N
NB	A Legitimate Relationship refers to the concept of the appli clinical relationship with the patient, and thus a legitimate report Note: Although a National Service for recording and enquir requirement is NOT intended to imply that it must always be envisaged that applications will contain sufficient local infort to access controls within the application, local workflow and patients to clinics / clinicians etc).	eason for ing on LF e used. In mation to	accessi Rs exists n most co infer ar	ing their , this ases it i n LR (e.ç	data. s g. due

4.6 Information Governance – Middleware Cross Organisational Data Sharing

Ref	Description	Client	Host	MW	SMSP	
MOD-MIG-01	The Toolkit Middleware SHOULD provide a facility to look up a patient's DCR Consent preference from PDS	N	N	Y	N	
1	The Toolkit Middleware MUST offer an ability to access PDS and look up the value of a patient's DCR Consent flag at the time of generating or processing a message.					

MOD-MIG-02	The Toolkit Middleware SHOULD provide a configurable capability to enrich message content with the patient's DCR Consent preference from PDS	N	N	Υ	N		
1	Toolkit message definitions MAY include a field to contain the patient's DCR Consent preferences.						
2	Toolkit message definition for patient's consent preferences MUST only be populated with the latest patient's expression of wish and MUST NOT be stale values.						
3	Toolkit applications MUST enrich message content in populating the DCR consent field with the latest PDS value, where the application is PDS connected.						
4	If the Toolkit Middleware is unable to perform the lookup for any reason (e.g. no NHS Number) then it MUST leave the DCR Consent field unpopulated.						

MOD-MIG-03	The Toolkit Middleware SHOULD offer a configurable capability to automatically block cross organisational data sharing if a patient has indicated "Express Dissent"	N	N	Υ	N			
1	A Toolkit solution MUST retrieve the patient's PDS Consent flag to determine whether cross organisational data sharing is possible, when communicating outside of the organisation boundary.							
2	A Toolkit solution MUST compare the sending and receiving an organisational boundary is being crossed.	A Toolkit solution MUST compare the sending and receiving organisations to determine if an organisational boundary is being crossed.						
3	A Toolkit solution MUST return an error indicating dissent for where a patient dissent has been recorded.	or a rece	eived qu	ery mess	age			
4	A Toolkit solution MUST NOT route a message to a cross-capatient dissent has been recorded.	organisa	tional de	estination	where			
5	A Toolkit solution MUST log all messages that are not actio dissent control.	ned as	part of t	he patient	İ			
6	A Toolkit solution MUST assume Express Dissent if the pat cannot be retrieved.	ients D0	CR cons	ent prefe	rences			

4.7 Information Governance – Sealing

Ref	Description	Client	Host	MW	SMSP
MOD-AIG-06	Toolkit Applications MUST NOT allow sealed data to leave the application	Υ	N	N	Υ
1	Many applications have an ability to flag certain items of cli and locked". This data MUST NOT be allowed to leave the application ir Note: Based on current IG policy, a dispensation on compli be granted where it can be shown that BOTH (i) the patient sharing of sealed date AND (ii) the receiving application als mechanisms in place. This dispensation must be explicitly basis.	n any Too ance with t has exp so has ap	olkit mes of this red licitly ag opropriat	sages. quireme reed to e sealin	nt MAY the g

4.8 Monitoring and Management

Ref	Description	Client	Host	MW	SMSP
MOD-MGT-01	Toolkit Implementations MUST provide a console for viewing of key technical settings and status indicators	0	0	Y	0
MOD-MGT-02	Toolkit Implementations MUST provide a console for realtime technical configuration adjustments	0	0	Y	0
MOD-MGT-03	Toolkit Implementations MUST provide a console for administration of undelivered messages	0	0	Y	0
MOD-MGT-04	Toolkit Implementations SHOULD maintain an audit trail of configuration changes	0	0	Y	0
MOD-MGT-05	Toolkit Implementations MUST provide version management capabilities, including artefact versioning and rollback	0	0	Y	0
MOD-MGT-06	Toolkit Implementations SHOULD provide housekeeping facilities	0	0	Y	0
MOD-MGT-07	Toolkit Implementations MUST support message tracking, based on a configurable subset of message fields	0	0	Y	0

MOD-MGT-08	Toolkit Implementations MUST provide tools for log reporting	0	0	Y	0
MOD-MGT-09	Toolkit Implementations SHOULD provide tools for SLA management	0	0	Υ	0
MOD-DIS-02	Toolkit Implementations SHOULD provide a Repository for storing rich Service and dependency information	0	0	Υ	0

4.9 Orchestration

Ref	Description	Client	Host	MW	SMSP		
MOD-ORC-01	Toolkit Implementations MUST support internal routing to multiple destinations in series	0	0	0	0		
1	The Toolkit implementation MUST be able route to multiple endpoints in sequence						

MOD-ORC-02	Toolkit Implementations MUST support internal routing to multiple destinations in parallel	0	0	0	0				
1	The Toolkit implementation MUST be able route to multiple independence of any failure of any individual message.	The Toolkit implementation MUST be able route to multiple endpoints in parallel, with independence of any failure of any individual message.							
NB	Only applies to correspondence.								

4.10 Sequencing

Ref	Description	Client	Host	MW	SMSP
MOD-ASQ-01	Host Applications MUST ensure business sequencing of Toolkit invocations, where this is required	N	Υ	N	Υ

NB	The Toolkit implementation must handle invocations that may arrive in the wrong order.

MOD-ASQ-02	Client Applications SHOULD support insequence invocation of Toolkit services, where this is required	Y	N	N	N		
1	Service Client Application SHOULD be able to preserve a technical FIFO sequence of events when placing outbound calls to the Toolkit.						
2	The implication of this FIFO processing is that the Service Client Application MUST await a successful SOAP response from one outbound call before placing the next one.						
3	Where it is provided then the use of FIFO processing SHOUI allow further implementation flexibility.						
Therefore this behaviour SHOULD only be provided by a Service Client Application groups of Toolkit invocations where the sequencing is known to be significant.					OI		

MOD-ASQ-03	Host Applications SHOULD support FIFO internal processing, where this is required	N	Y	N	Υ
NB	First-In-First-Out (FIFO) processing means that invocations a order as they are received. In other words, if calls are made in a certain sequence then the Service Host Application show they will be processed in that same sequence. Note that this is a purely technical feature involving the in-se invocations. It does NOT imply any inspection of the message logic about what the "correct" sequence of events should be. This is a feature that may be useful in some circumstances we (e.g. the Toolkit) may have already sorted the events into the case the Service Host Application can benefit if it is able to printernally – thus avoiding the need for potentially more compared MOD-ASQ-01). Note that this feature is NOT an alternative to MOD-ASQ-01 that may be applicable in some circumstances. Applications upstream environment they will be deployed into, and therefore ASQ-01 as a minimum.	to the Sould be all quence le conter where up a correct lex Busing, rather incannot by	process nt, nor a estream FIFO of the FIFO ness Se t is an of pe sure a	ost Appliarantee ing of ny busin compon rder. In to D seque quencin ptimisati	ication that that ess ents his nce g (as-

MOD-MSQ-01	The Toolkit Middleware MUST support	N	N	Υ	N			
	configurable FIFO internal processing							
NB	First-In-First-Out (FIFO) processing means that invocations are processed in the same order as they are received. In other words, if calls are made to the Toolkit in a certain sequence then the Toolkit must be able to guarantee that they will be processed by the Toolkit in that same sequence.							
	Note that this is a purely technical feature involving the in-sequence processing of invocations. It does NOT imply any inspection of the message content, nor any business logic about what the "correct" sequence of events should be.							
	An example would be if a stream of patient events are delivered to the Toolkit including, for example, admittance, ward transfers, discharge etc. It may be the case that the sending application is known to trigger these events to the Toolkit in the correct order. In this case it must be possible to ensure that the Toolkit does not become a cause of "jumbling them up".							
	Note that while FIFO processing is a useful behaviour, it had not always desirable. For example message sequencing is where this is the case then parallel processing can be used scalability. Even if sequencing is relevant, any approach bat be carefully considered on a use-case by use-case basis. It FIFO processing can scale to the required volumetric for the case then other approaches - such as business-sequent application - must be used.	is not always relevant, and ed to increase throughput and pased on FIFO processing mu. It is important to be certain the use-case. Where this is no						
	Therefore the use of FIFO processing MUST be configurable on/off for a given segroup of services.							

MOD-MSQ-02	The Toolkit Middleware MUST support configurable FIFO outbound invocations	N	N	Υ	N
NB	On a similar theme to MOD-MSQ-01, the Toolkit must be a FIFO sequence when placing outbound calls This feature can be used, for example: 1. In combination with MOD-MSQ-01 to preserve a comple Toolkit 2. In combination with MOD-MSQ-03 to enable the Toolkit invocations, and then ensure this sequence is preserved in The implication of this FIFO processing is that the Toolkit response from one outbound call before placing the next of As-per MOD-MSQ-01 this approach has tradeoffs, and who needed then parallel processing can be used to increase the of FIFO processing MUST be configurable on/off for a give services.	te FIFO to apply downst nust awa ne. ere FIFC	sequence busines ream ca ait a succ sequer ut. There	ce throus rules to the state of	gh the to sort

MOD-MSQ-03	The Toolkit Middleware SHOULD support configurable content-based business sequencing	N	N	Υ	N				
NB	For each service or group of services it should be possible to configure (1) a c (2) a sequence field, that the Toolkit Middleware will then use to sort invocatio correct business sequence.								
	Ideally it should be possible to configure multiple context fit. This feature might be used, for example, to order related expatient. This could be relevant either to (i) sort events transcapable of ensuring FIFO Toolkit invocations or (ii) to collar multiple separate source systems. It offers the possibility of business sequencing processing from the end application.	order related events within the context of a ort events transmitted by a system that is no s or (ii) to collate events transmitted by ne possibility of the Toolkit offloading this							
	Note that for this feature to be useful, it will need to be used MSQ-02, to ensure the sequence is preserved downstream		bination	with M	OD-				

4.11 Spine Mini Services

Ref	Description	Client	Host	MW	SMSP			
SMSP-AUDIT-001	The system MUST provide a secure audit trail	N	N	N	Υ			
1		The SMSP MUST provide a secure, tamper-proof audit store sufficient to meet IG Requirements for a system accessing PDS data.						
2	This includes protecting the audit store from audit trails are enabled at all times.	This includes protecting the audit store from deletion or modification, and ensuring that audit trails are enabled at all times.						
3	Deletion of an audit record should only be p such as a court order.	ossible in tl	ne case of s	specific co	onditions			
4	Audit data MUST be stored for periods as defined by DH policy and described in the NHS Records Management Code of Practice Parts 1 and 2. (see http://www.dh.gov.uk/en/Publicationsandstatistics/Publications/PublicationsPolicyAndGuidance/DH_4131747.							

SMSP-SEC-001	Documentation MUST describe the approach to securing Spine Mini Services endpoints	N	N	N	Υ
1	The SMSP MUST provide documentation s controls e.g. to restrict the networks and network can be accessed, Security controls (authentication an Process for enabling a new Mini Service) Process for disabling a Mini Service	c locations f d authorisa ervices clien	rom which tion)	the Mini S	ervices

4.12 Translation and Mediation

Ref	Description	Client	Host	MW	SMSP			
MOD-TRN-01	Toolkit Implementations MUST provide the ability to configure structural translations	0	0	Υ	0			
1	The Toolkit implementation MUST provide the ability to per between messaging formats.	The Toolkit implementation MUST provide the ability to perform structural translations between messaging formats.						
2	The Toolkit implementation SHOULD support XSLT for structural translations.							

MOD-TRN-02	Toolkit Implementations MUST provide the ability to configure domain value look-up translations	0	0	Υ	0		
1	The Toolkit implementation MUST provide domain value look-up translations.						
2	The Toolkit implementation MUST only use domain value look-ups for trivial reference data.						

MOD-TRN	N-03	Toolkit Implementations SHOULD provide the ability to cross-reference identifiers	0	0	Y	0	
1		The Toolkit implementation SHOULD provide domain value look-up translations and cross referencing for alternative identifiers, with agreement with Clinical Safety.					

MOD-TRN-04	Toolkit Implementations SHOULD provide out-of- the-box Toolkit Adapters for common transport protocols	0	0	Υ	0			
1	The Toolkit implementation adapters SHOULD implement H ⁻ protocol.	The Toolkit implementation adapters SHOULD implement HTTP(S) as a common transport protocol.						
2	The Toolkit implementation adapters SHOULD implement HI protocol for existing HL7v2 implementations.	The Toolkit implementation adapters SHOULD implement HMLLP as a common transport protocol for existing HL7v2 implementations.						
3	The Toolkit implementation adapters SHOULD implement FTP as a common transport protocol for file transfers.							
4	The Toolkit implementation adapters SHOULD implement eb protocol when communicating with NHS Spine.	XML as	a comn	non trans	sport			

MOD-TRN-05	Toolkit Implementations MUST provide an out-of- the-box adapter to convert between "pipe-and-hat" and ANSI XML representations of HL7v2	N	N	N	N		
1	The Toolkit implementation MUST be able to support messages in Toolkit XML and HL7v2 pipe-and-hat, for both send and receive.						
2	The Toolkit implementation MUST be able to translate betwee pipe-and-hat.	en Tool	kit XML	and HL7	7v2		

MOD-TRN-06	Toolkit Implementations MUST provide a documented framework for bespoke Toolkit Adapter creation	0	0	Υ	0	
1	The Toolkit implementation MUST provide a documented approach for additional adapters to be created, this can be through a published SDK or a service / commercial arrangement.					

4.13 Throttling

Ref	Description	Client	Host	MW	SMSP					
MOD-THR-01	Toolkit Implementations MUST be self-protecting against overloading by inbound calls	N	0	Υ	0					
1		The Toolkit implementation MUST implement a rejection with error notification, when a configurable peak demands inbound messages water mark is reached.								
2	The Toolkit implementation SHOULD implement a buffer / message demands.	The Toolkit implementation SHOULD implement a buffer / queue to support high peak message demands.								
3	The Toolkit implementation MUST implement a mechanism messages normally again once excess peak demand has process once again.				1					

MOD-THR-02	Toolkit Implementations SHOULD support configurable throttling	N	0	Υ	0		
1	The Toolkit implementation SHOULD allow for throughput throttling for out bound message with persistence.						
2	The Toolkit implementation MUST, where throttling is implementation buffers key metrics are breached.	nented p	rovide a	lerting if			

4.14 Validation

Ref	Description	Client	Host	MW	SMSP			
MOD-VAL-01	Toolkit Implementations MUST allow schema validation to be configured for each service	0	0	Υ	0			
1	Configurable schema validation MUST be provided, so a senforced for each service.	chema ca	n be se	lected a	nd			
2	Schema validation SHOULD be configurable, so that scher disabled on a per-service basis.	schema validation SHOULD be configurable, so that schema validation can be enabled / isabled on a per-service basis.						

MOD-VAL-02	Toolkit Implementations MUST allow validation of domain value lookups to be optionally configured for each service	0	0	Y	0	
1	The ability to check domain values against vocabularies MUST be supported driven by configuration for each service, where more volatile references are used.					

MOD-VAL-03	Toolkit Implementations MUST allow validation of header data to be configured	0	0	Υ	0
1	The Toolkit implementation MUST validate header field data specifications.	in line w	rith the n	nessage	}

MOD-VAL-04	Toolkit Implementations SHOULD allow additional content validation to be optionally configured for each service	0	0	Y	0
1	It SHOULD be possible to configure, where appropriate, additabove schema validation.	tional X	ML valid	ation ov	er and

4.15 XML Encryption

The diagram below shows the structure of an encrypted payload, illustrating how the payload itself is encrypted as CipherData using a symmetric cipher, and the encrypted key then packaged for one or more recipients using their public key. This is independent of underlying transport protocol.

If payload encryption is required, the following requirements are necessary.

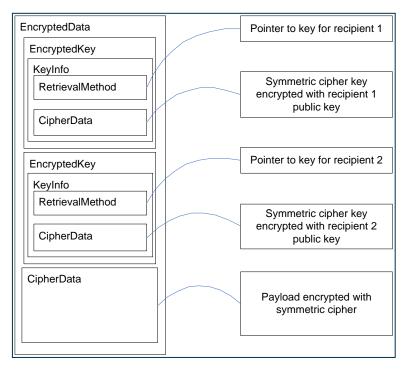


Figure 3 – ITK Encryption and Cipher

An EncryptedData element provides the top level wrapper around both CipherData and EncryptedKey(s).

Ref	Description	Client	Host	MW	SMSP
MOD-EEX-10	The payload MUST be encrypted as CipherData using a symmetric cipher	0	0	N	0
1	The key for such a symmetric cipher MUST be unique to the	is messa	ige insta	nce.	
NB	Further information on other 'Approved Cryptographic Algo DHID Infrastructure Security Team Good Practice Guidelin (http://systems.hscic.gov.uk/infogov/security/infrasec/gpg/a	e docume			

MOD-EEX-11	The symmetric key MUST be packaged as an EncryptedKey	0	0	N	0		
1	The symmetric key MUST be encrypted using the recipient's public key and carried in an EncryptedKey (if SOAP) element which is a child of EncryptedData.						
2	Each EncryptedKey MUST contain a KeyInfo consisting of an accessible RetrievalMethod and the symmetric key itself as Cipher Data.						
NB	Further information on other 'Approved Cryptographic Algorit DHID Infrastructure Security Team Good Practice Guideline (http://systems.hscic.gov.uk/infogov/security/infrasec/gpg/acs	docume					

MOD-EEX-12	Multiple EncryptedKey elements MUST be supported	0	0	N	0	
1	This is to allow encrypted messages to be sent to multiple recipients - the key for the symmetric cipher MUST be packaged as an EncryptedKey for each recipient.					
2	Senders MAY resolve more than one public key per recipient (for example, departmental and organisational keys).					
NB	Determination and discovery of public keys for recipients is or requirement, although the next section provides some general a PKI.				lishing	

Encryption will make use of digital certificates, for which the following requirements and guidance apply:

Ref	Description	Client	Host	MW	SMSP
MOD-EEC-01	PKI certificates MUST be from a trusted CA	0	0	N	0
1	Toolkit Implementations MUST check certificate chains and confirm that the certificate is from a trusted Certificate Authority (CA), as well as verifying the status of the certificate with the Certificate Authority via an appropriate Certificate Validation Service. e.g. Checking the Certificate Revocation List (CRL).				
2	Specifically a certificate MUST NOT be accepted if: • A Relying Party cannot build a valid certificate path to validate the presented End Entity certificate to a trusted Root Certificate Authority that the Relying Party trusts.				
3	Specifically a certificate MUST NOT be accepted if: • A Relying Party determines that any certificates in the certificate chain fail integrity checks.				
4	Specifically a certificate MUST NOT be accepted if: • A Relying Party determines that any certificates in the cer have expired or have been revoked.	tificate pa	ath are n	ot yet va	alid,

Notes on certificate sourcing:

In the absence of a single trusted NHS-wide PKI then the sourcing of certificates remains, at present, an implementer's responsibility. This is therefore a crucial aspect to consider and, while not formally part of this specification, the following general guidance may be useful.

On a purely technical level the setting up of a Certificate Authority to issue certificates is relatively straightforward. For example there are various free tools available - such that a test server might be configured by a knowledgeable developer with relatively little effort.

However whilst this might be suitable for testing, there are significant challenges involved in setting up a Certificate Authority for production use. The key point is that the Certificate Authority underpins the entire web of trust built upon it – therefore any weakness in the Certificate Authority compromises security for all systems using it.

Points to consider include:

The security controls protecting the CA

This includes consideration of technical, physical, and procedural controls. As the foundation of security for all systems using its certificates then the CA itself is typically hosted in a secure facility and protected by strict security controls.

The procedure for issuing certificates

Even if the CA itself is secure, the certificates are only as meaningful as the rigour of the checks which are performed before issuing one. For example, what checks are done to ensure that the real-world identity of the requester really does match what is entered in the "subject" field?

(Be aware that the entry-level service offered by many well-known commercial certificate providers only performs minimal checks, and will essentially issue any "subject" which has not been used before and for which the requestor is willing to pay).

• The cryptographic algorithms used in the certificates

Further information on other 'Approved Cryptographic Algorithms' can be found in the DHID Infrastructure Security Team Good Practice Guideline document available here: http://nww.connectingforhealth.nhs.uk/infrasec/gpg.

The ability of the CA to offer certificate status information

For example does it make available a Certificate Revocation List (CRL)?

Uniqueness of the subject field

Related to the above is consideration of how the "subject" field is allocated to ensure its uniqueness and easy interpretation. Various approaches are possible – for example the use of ODS / NACS codes in the subject is one approach which may assist with easily identifying the NHS organisation.

• The policy regime surrounding the certificates

The certificates themselves are only part of a wider solution based upon the policies for their issuing and usage e.g. "Subscriber" and "Relying Party" agreements. It is therefore important to ensure that these policies are rigorously written and suitable for the intended use.

The establishment and/or selection of a PKI and CA are significant and complex undertaking and it is only possible to provide a brief overview here. Readers are strongly encouraged to seek expert professional advice if they are unfamiliar with the issues and require further guidance.

* * * End of Document * * *